

AUTOMATIC SYSTEM FOR
RESIDENTIAL SLIDING GATES

VERO®


METAL PINION GEAR



Specification of Motor	VERO [1500 kg]
Power supply	AC 220-240 v 50 Hz, single phase
Motor type	Oil bath gear motor
Motor rotation speed	1400 rpm
Operating ambient temperature	-25°C to 60°C
Power supply for accessories	24 Vdc
Absorb power	550 watts
Thermal protection	At 120°C built into motor winding
Max weight of gate	1500 kg / force adjustable
Pinion gear	Z 19 / Z 24
Gate speed	12 metre / min
Clutch	Mechanical slip clutch
Protection class	IP 44
Manual optional	Special released key for power failure



VERO®

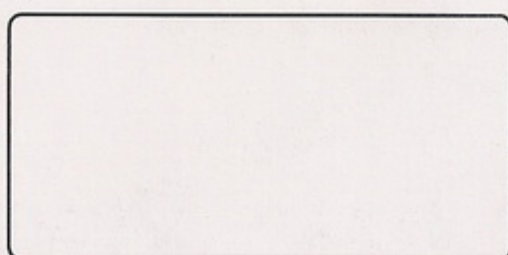

DISTRIBUTOR